



The A34E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections. • Balanced, completely reversible design allows the A34E to be used to secure a wide variety of connections.

[UK-DoP-e07/0137](#), [ETA-07/0137](#)

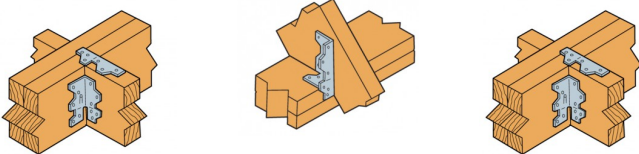

TECHNICAL DATA

A34 / A35



References	Dimensions and drill holes [mm]			Number of Fasteners		Safe Working Loads [kN]	
	A	B	C	Qty	Specification	Long term download - Timber C16	
						Download	R _{2,k}
A34	36	36	63	8	3.75 x 30mm	1.30	1.06

A34 Characteristic

References	Number of Fasteners		Characteristic Capacities [kN]	
	Qty	Specification	C24 Timber	
			Download	R _{2,k}
A34	8	3.75 x 30mm	0.97	0.63

